



The Endoline 200 Series has become one of the most successful case erector designs in over 20 years of production. Key to its success are a number of unique features that combine to make it extremely efficient, reliable and versatile while handling a wide variety of case sizes and styles.

### Features of the 205/208 include:

#### Dual Opposing Vacuum Case Opening



This unique design feature ensures that each case is opened positively from both sides. It ensures the efficient and reliable opening of cases, and overcomes problems that can be associated with stiff board and glue migration from the manufacturer's joint.

#### Compact

**Width:**  
1260mm  
**Height:**  
1560mm


With a surprisingly compact footprint these machines will fit in to areas with restricted floor space or areas not normally suited to the installation of large or bulky machinery.

#### Easy to Use



With simple operator controls this machine is easy to use and ensures that it is available for the maximum time. The hopper design provides easy access for case loading and the machine design offers clear access for cleaning and maintenance.

#### Consistency



The compression section guarantees the secure sealing of cases, and the machine also ensures the consistent squaring of cases for feeding in to robotic case packers.

#### Robust construction



High quality components, housed in a robust, computer designed chassis allow for minimal servicing. The 205 is designed for the rigours of typical 24-hour end-of-line packaging environments.

#### Low Cost Of Ownership



As with all our machines, the Endoline 205 Case Erector is designed to give you the best possible value for your investment. Our unique set of features and benefits means you will gain the maximum productivity from your Endoline Case Erector with minimal stoppage time for problem-solving or case size changes.




# 205 & 208

## Fully Automatic Case Erectors

### Options include:

- Hopper extension unit
- Low hopper sensing
- Low glue sensing

Type 205 dimensions shown

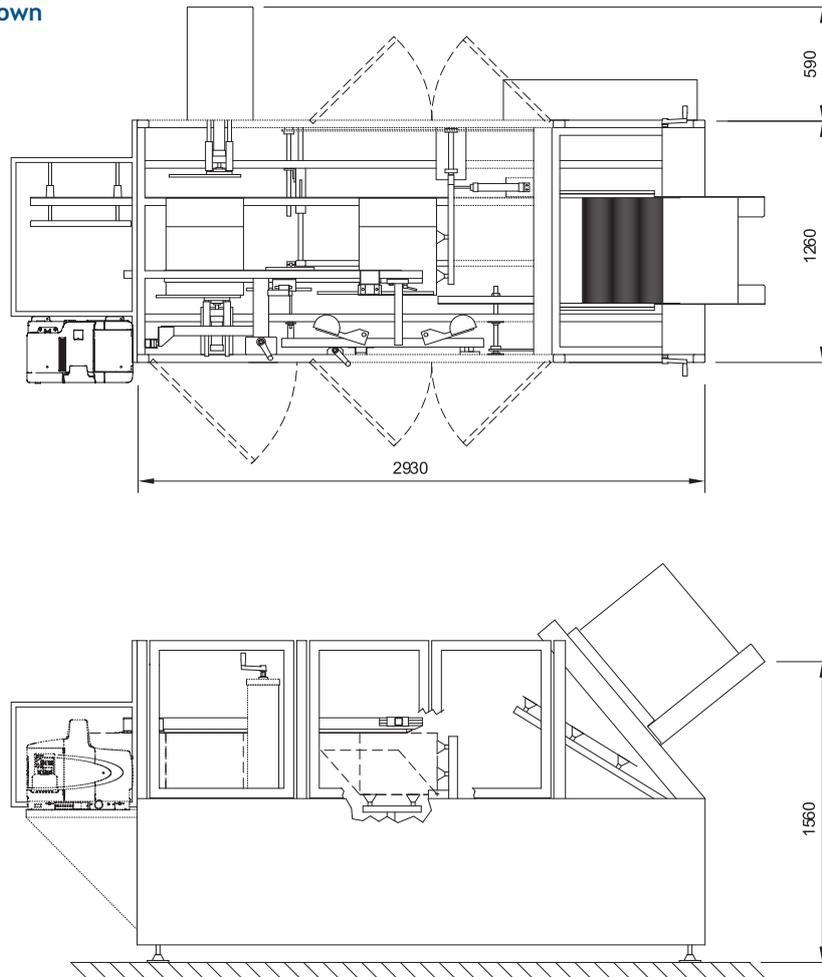

Case Dimensions (mm)

	Length	Width	Height (Open)
205 Minimum	230	180	240
205 Maximum	450	350	510
208 Minimum	135	100	215
208 Maximum	220	200	380

### Speed

Type 205: 18-22 cases per minute dependent upon case size range

Type 208: 24-28 cases per minute dependent upon case size range

### Electrical Supply

Three phase:  
380 - 415V, 50Hz, 5.0kW

### Pneumatics

80psi (5.5 bar)

### Machine Finish

Mild steel, powder coated white (RAL 9010) or stainless steel

© Endoline reserves the right to change specifications without prior notice.



**Endoline Machinery Limited**  
Stratton Business Park, London Road  
Biggleswade, Bedfordshire  
SG18 8QB  
United Kingdom

Telephone: +44 (0) 1767 316422  
Facsimile: +44 (0) 1767 318033  
E-mail: sales@endoline.co.uk  
Website: www.endoline.co.uk

# system range