



The Endoline 200 Series has become one of the most successful case erector designs in over 20 years of production. Key to its success are a number of unique features that combine to make it extremely efficient, reliable and versatile while handling a wide variety of case sizes and styles.

Features of the 220 Series include:

Dual Opposing Vacuum Case Opening



This unique design feature ensures that each case is opened positively from both sides. It ensures the efficient and reliable opening of cases, and overcomes problems that can be associated with stiff board and glue migration from the manufacturer's joint.

Low Cost of Ownership



The Endoline 220 Series of Case Erectors is designed to give you the best possible value for your investment through maximum productivity with minimal stoppage time for problem-solving or case size changes.

Compact

Width:
1810mm
Length:
1750mm

With a surprisingly compact footprint these machines will fit in to areas with restricted floor space or areas not normally suited to the installation of large or bulky machinery.

Clear Access



Simple mechanical operation and clear access for easy size change, cleaning and maintenance.

Easy to Use



The 220 series is designed with clear access, simple controls and quick to adjust to size changes. The machines are operator friendly and allow for quick and easy size change, cleaning and maintenance to ensure minimal machine down time.

Robust Construction



High quality components, housed in a robust, computer designed chassis allow for minimal servicing. Designed for the rigours of typical end-of-line packaging environments.




221 & 223

Fully Automatic Case Erectors

Options include:

- Message display unit
- Low hopper sensing
- Low tape and no tape sensing
- Visual/audible failure alarm
- Low glue sensing (223)
- High speed

221 Shown

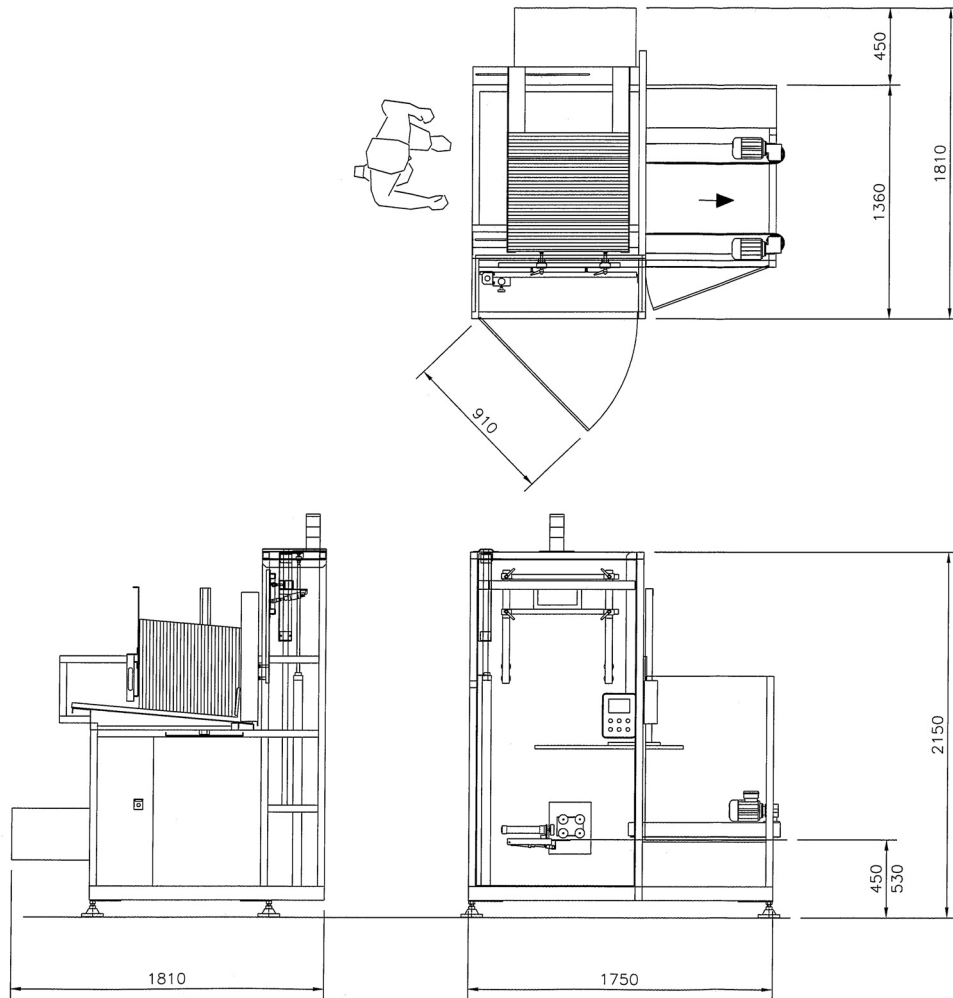

Case Dimensions (mm).

		Length	Width	Height (Open)
221/223	Minimum	200	150	175
	Maximum	500	400	600

Note: The 221 case erector seals cases with self-adhesive tape.

The 223 case erector seals cases with hot melt glue.

Speed

Standard infeed up to 16 cases per minute

Optional up to 18 cases per minute

Electrical

Type 221 Three phase:
380 - 415V, 50Hz, 0.5kW

Type 223 Three phase:
380 - 415V, 50Hz, 4.0kW

Pneumatics

80psi (5.5bar)

Machine Finish

Mild steel, powder coated white (RAL 9010) or stainless steel

Tape Size

Standard: up to 50mm wide
Optional: up to 75mm wide

© Endoline reserves the right to change specifications without prior notice.



Endoline Machinery Limited
Stratton Business Park, London Road
Biggleswade, Bedfordshire
SG18 8QB
United Kingdom

Telephone: +44 (0) 1767 316422

Facsimile: +44 (0) 1767 318033

E-mail: sales@endoline.co.uk

Website: www.endoline.co.uk

system range