



This is the dominant machine of its type having originally been developed for the biscuits and snack foods industries. It automatically adjusts to random sizes while sealing small and large, lightweight and heavy cases without the need for an operator. It is fully automatic and provides secure and accurate taping at speeds of up to 14 cases per minute. Fully automatic random sealing machines are ideally suited to applications where there is insufficient room for a sealer on each packing line.

Features of the 704 include:

Fully Automatic



No operator required except for tape reel changing, the 704 provides secure, accurate taping at maximum speed of 14 cases/minute.

Interchangeable Tapeheads



The 704 uses any machine tape up to 50mm wide, 1000m long and features instantly removable, interchangeable tapeheads, easily threaded, with integral knife guards for rapid tape re-load.

Ease of Operation



Simple mechanical operation and clear access allows for easy cleaning and maintenance. The machine is also easy to install with height adjustment and it is on castors.

Four Column Construction



The use of our unique four column design provides added stability for the taping bridge to ensure the machine runs smoothly at all times with minimal interruption and it provides the support necessary for the floating bridge feature. This fully automatic machine is fitted with two pairs of columns for additional support to the folding section.

Robust Construction



High quality components housed in a robust chassis ensure minimal servicing and enable 24 hour operation. Designed for the rigours of typical end-of-line packaging environments.

Low Cost of Ownership



All Endoline's machines are designed for maximum efficiency and productivity thereby reducing the cost of ownership to a minimum. This case sealer comes at a low capital cost and immediate savings can be seen through reduced labour costs and increased packing speeds.




704

Fully Automatic Random Case Taper

Options include:

- Low tape and no tape sensing
- Visual/audible alarm
- Discharge blocked sensing
- Automatic tapehead retract

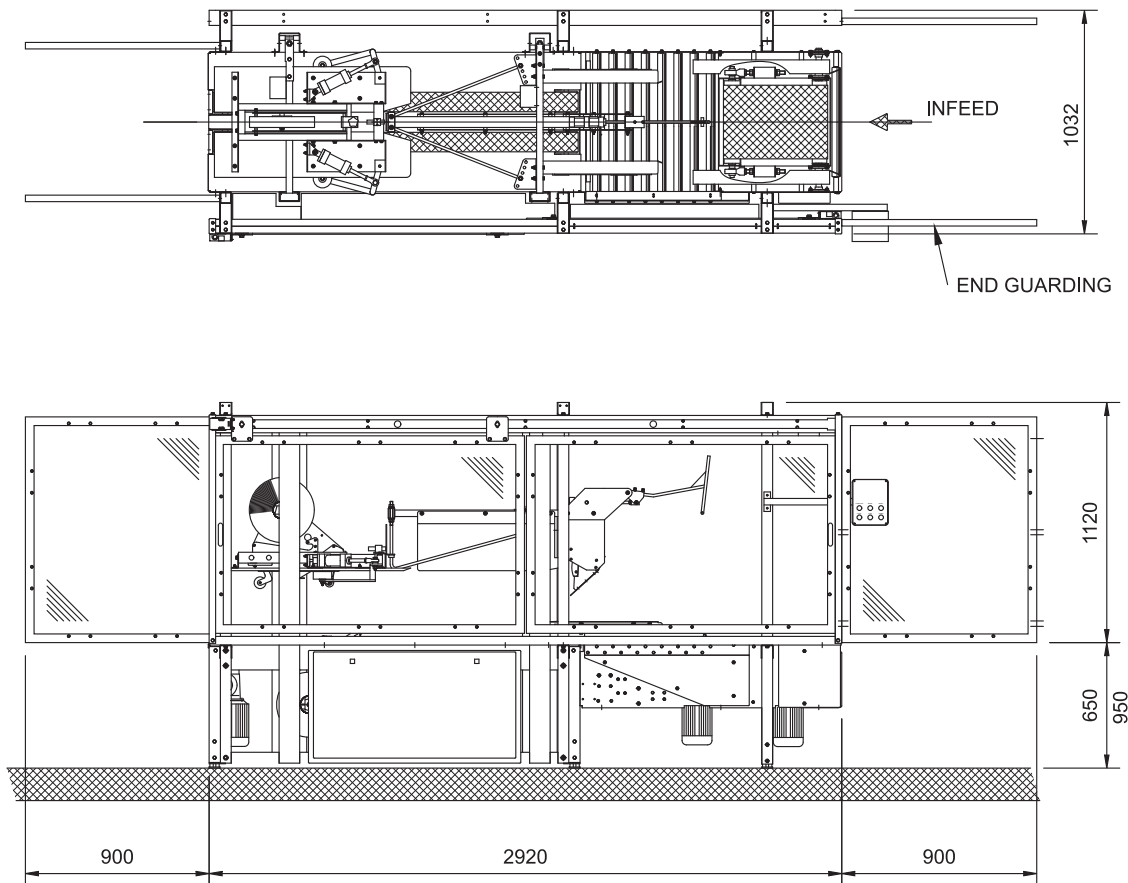

Case Dimensions (mm)

Length	Width	Height
200-600	140-420 (or 170-480)	110-480

Note: Non-standard machines can seal cases with larger/smaller dimensions. Please ask for details.

Tapeheads/folding head can be retracted to allow passage of plastic trays. Selective coding possible by electronic sensing.

Electrical Supply

Three Phase: 415V, 50Hz

Pneumatics

80psi (5.5 bar)

Machine Finish

Mild steel, powder coated white (RAL 9010) or stainless steel

Tape Size

38mm, 50mm, 75mm

© Endoline reserves the right to change specifications without prior notice.



Endoline Machinery Limited
Stratton Business Park, London Road
Biggleswade, Bedfordshire
SG18 8QB
United Kingdom

Telephone: +44 (0) 1767 316422
Facsimile: +44 (0) 1767 318033
E-mail: sales@endoline.co.uk
Website: www.endoline.co.uk

system range