


Fully automatic bag packer


olibag 210 with olimat 1

- » Suited for any bags, blister wraps, flat or upright products, tubes, CD covers, or folding boxes
- » Integrated case erector and sealer for American cases, wrap-around cases, and trays with/without lids
- » Product is supplied and sorted fully automatically
- » Modular design extendable with the *oli-pal* to operate as a fully automatic final packaging line
- » Processing is gentle on products offering highest process safety

operating principle of *olibag 210* with *olimat 1*: with American cases

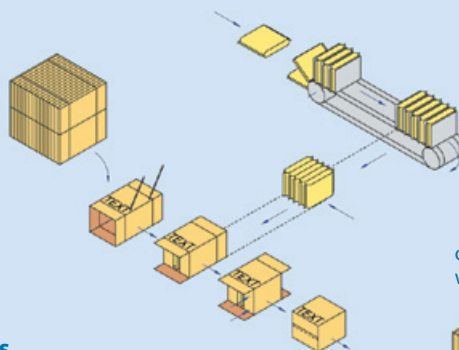

operating principle of *olibag 210* with *olimat 1*: with wrap-around cases

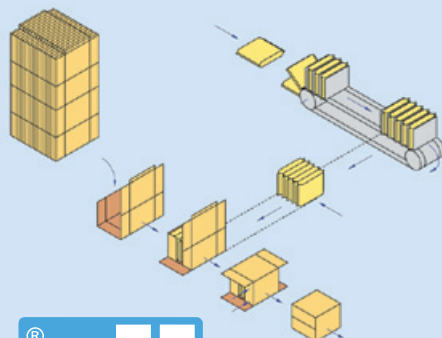

pack'solutions
customized



» Product infeed and flighted indexing chain

» Case magazine and erector

» Push-off by rake

» Packing and insertion into the case

» Folding and gluing of outside case flaps

Fully automatic bag packer

olibag 210 with olimat 1

This installation consists of the following modules

- » **olibag 210** semiautomatic bag packer
- » **olimat 1** or the **olimat 2P** case erector/sealer

The **oli-pal** or the **oli-pal Duplex compact palletiser** extend the installation to operate as a fully automatic final packaging line.

General information

Can be applied in all industries. Space-efficient design, superior workmanship/material quality and refined operationability in all details:

- Highest performance
- Continual product feed ensures excellent process stability
- Readily accessible
- Easy to operate
- Operator panel with multi-lingual text display or touchscreen panel
- Extensive format range, format is changed quickly
- High performance servo drives
- Practically maintenance free



Technical information

Output: up to 200 cycles/min, depending on product thickness, or up to 20 cases or trays/min
 Case/Tray format range (L x W x H mm): 100 - 500 x 60 - 340 x 100 - 400, or to customer preference
 Format range: to customer preference
 Operating voltage/required power: 3 x 230/400 V/N/PE, 50/60 Hz, 6 kVA
 Air pressure: 6 bar
 Floor layouts: Left or right-hand variants to customer preference
 Change over time: approx. 5 - 20 min

Note:
 oli packaging machinery is customized in terms of output, colour, installed load, etc., to suit the specific customer application. All machinery can be designed inversely for every format.



oli-pal A

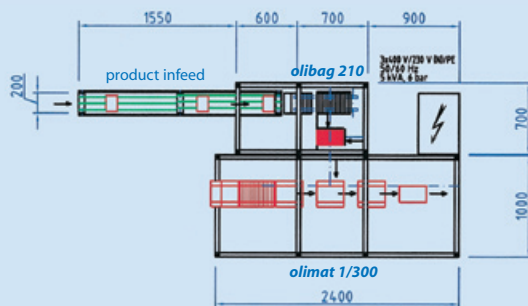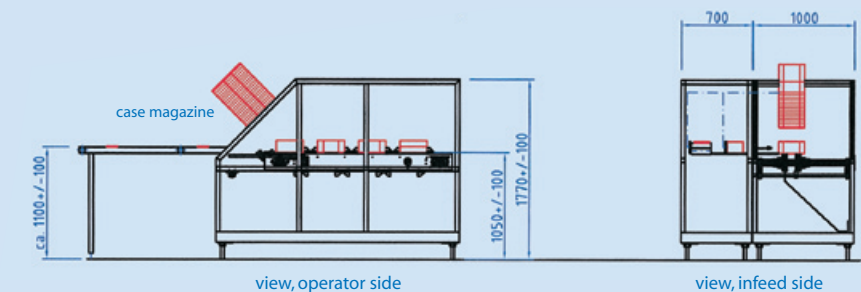

Layout (scale: 1:75)

Example of combination with oli-pal on request



pack'solutions
 customized

O. Lingenfelder
oli-Spezialanlagen GmbH
 Blumenstrasse 17-21
 82538 Geretsried
 GERMANY
 Phone +49 8171 96 73-0
 Fax +49 8171 96 73-10
 E-mail buero@oli-gmbh.de
www.oli-gmbh.de

oli agency